
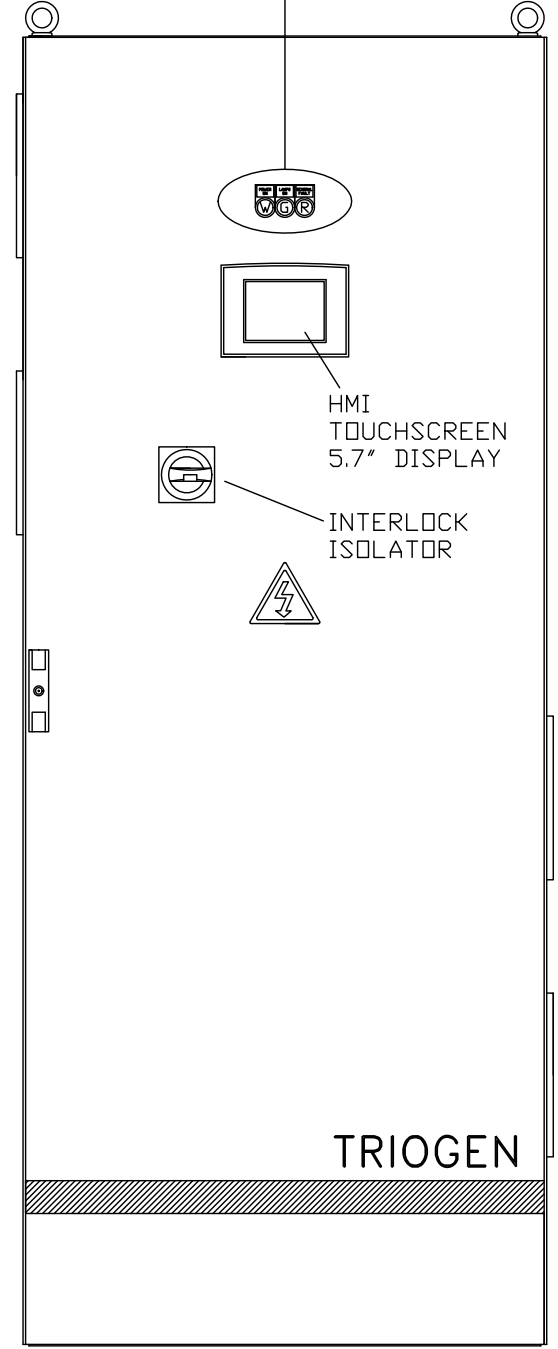


A B C D E

1  
2  
3  
4

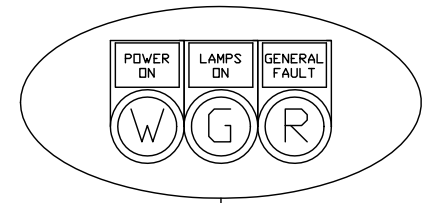


800MM

**SPECIFICATION**

PANEL TYPE: FLOOR MOUNTED.  
 PROTECTION: IP54 (≈NEMA 12)  
 (WITH GRILL FILTER MATS FITTED).  
 PANEL MATERIAL: 1.5mm (DOOR 2mm) STEEL PLATE.  
 FINISH: GREY RAL 7035 POLYESTER POWDER STRUCTURE PAINT.


- 12x LAMP CABLES (8m)
- 1x WIPER MOTOR CABLE (8m)
- 1x UV SENSOR CABLE (8m)
- 1x REACTOR TEMP. SENSOR CABLE (8m)

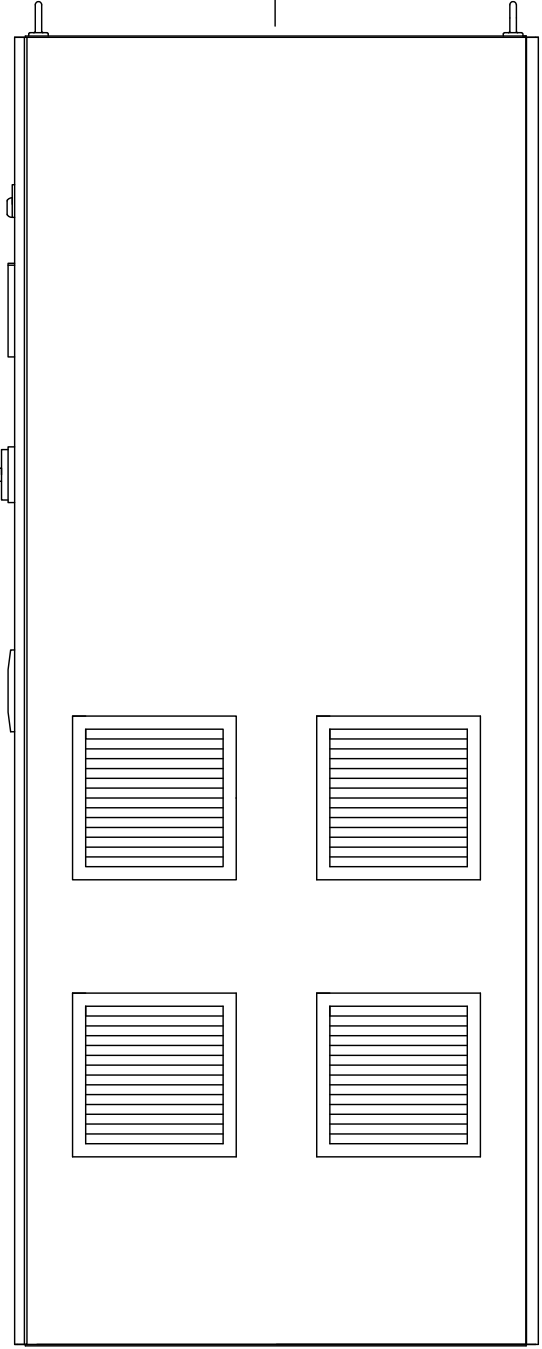


800MM

WEIGHT: 450kg. (ESTIMATED)  
 POWER CONSUMPTION: 73kW (pf>0.96).  
 MAX CURRENT: 144A (NORMALLY 128A @ 400V)  
 ELECTRICAL SUPPLY: 400V 3ph 50Hz.  
 TOTAL HARMONIC DISTORTION < 5%  
 RECOMMENDED SUPPLY CIRCUIT BREAKER: 160A TYPE B or C\*

**ACCESS REQUIREMENTS**

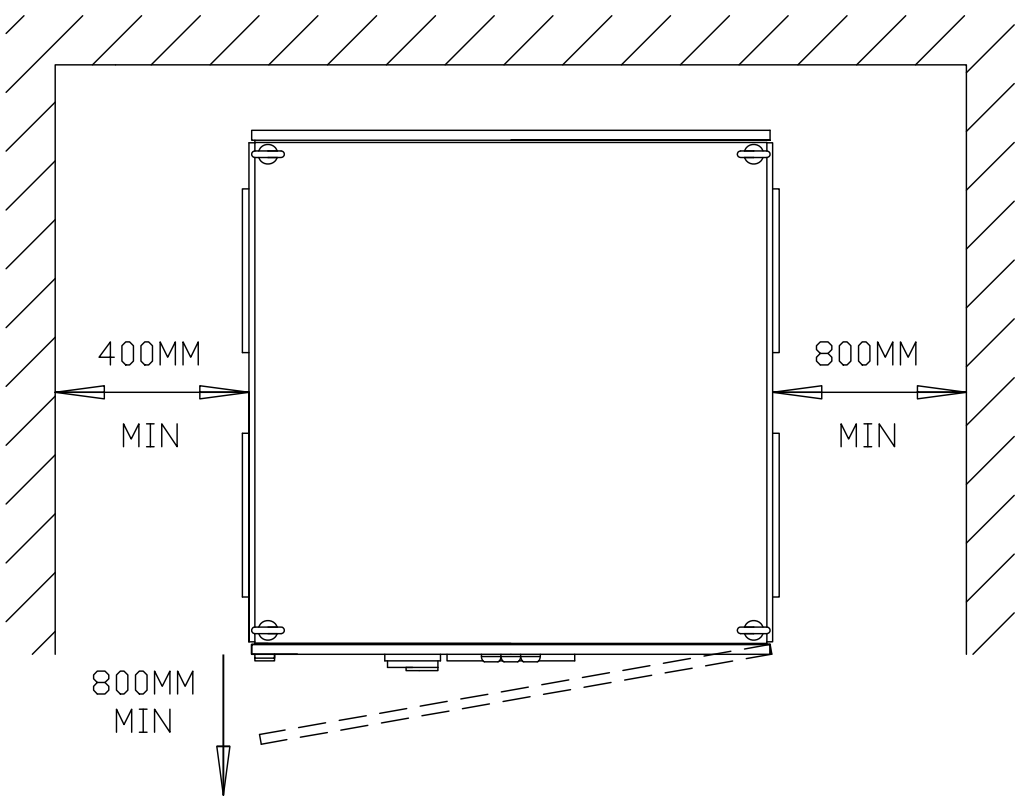

**ELECTRICAL CONNECTIONS**

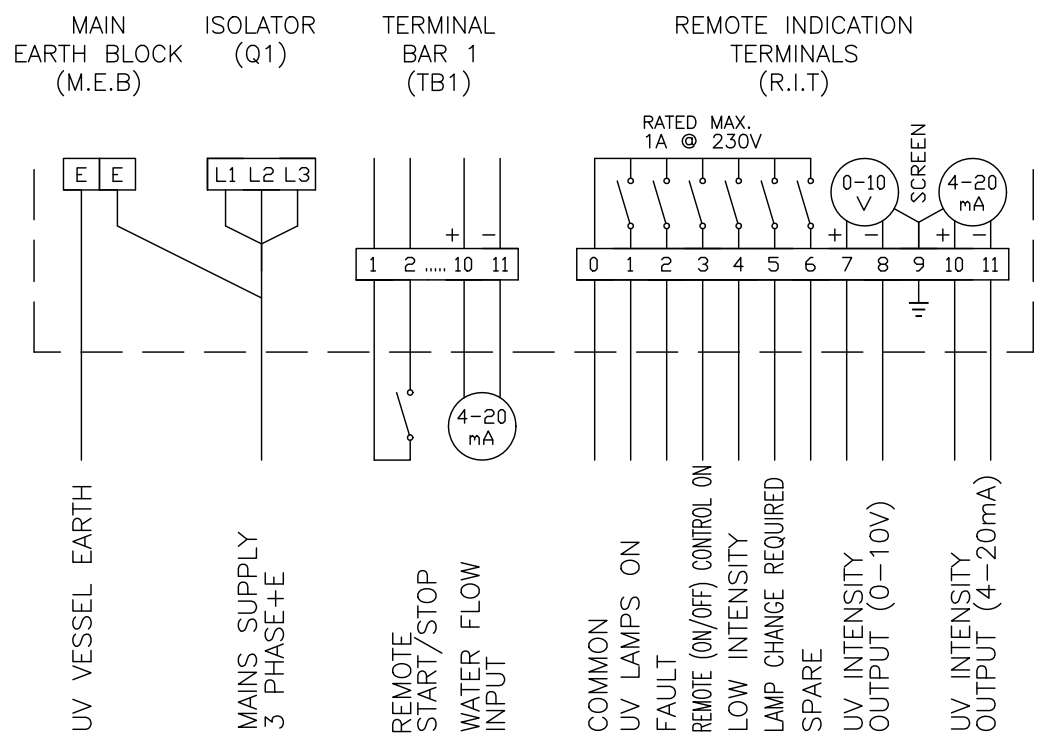

ALL CLOSE TO INDICATE - OPERATE

\*NOTE: CAN NOT BE USED WITH EARTH LEAKAGE/FAULT TYPE PROTECTION OR DETECTION DEVICES

ISSUE	REVISION	BY	DATE

**TRIOGEN LTD**  
 LANGLANDS PLACE, EAST KILBRIDE,  
 G75 0YF, SCOTLAND  
 TEL: +44 (0) 135 522 0598  
 FAX: +44 (0) 135 557 0058

TITLE:	DRAWN BY:	CHECKED BY:	DATE:
INTEGRA 900 CONTROL PANEL DATASHEET	RH		21/06/12
	DRAWING No. UD485		SHEET 1 REV -